

Chapter 11

Fluids

***Bernoulli's equation
conclusion***

11.9 Bernoulli's Equation

NC Work yields a
total Energy change.

$$W_{\text{NC}} = (P_2 - P_1)V$$


$$W_{\text{NC}} = E_1 - E_2 = \left(\frac{1}{2}mv_1^2 + mgy_1\right) - \left(\frac{1}{2}mv_2^2 + mgy_2\right)$$

Equating the two expressions for the work done,

$$(P_2 - P_1)V = \left(\frac{1}{2}mv_1^2 + mgy_1\right) - \left(\frac{1}{2}mv_2^2 + mgy_2\right)$$

$$m = \rho V$$

$$(P_2 - P_1) = \left(\frac{1}{2}\rho v_1^2 + \rho gy_1\right) - \left(\frac{1}{2}\rho v_2^2 + \rho gy_2\right)$$

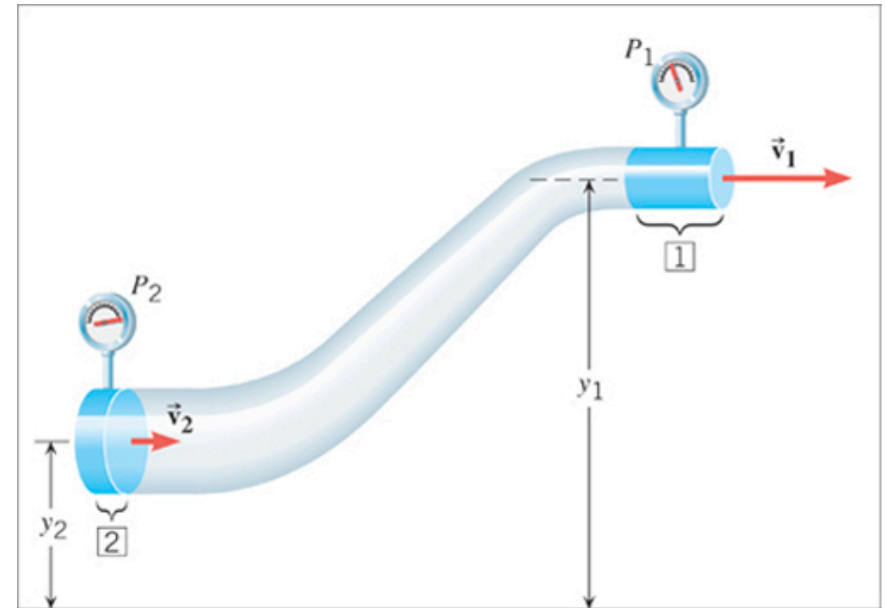

Rearrange to obtain Bernoulli's Equation

BERNOULLI'S EQUATION

In steady flow of a nonviscous, incompressible fluid, the pressure, the fluid speed, and the elevation at two points are related by:

$$P_1 + \frac{1}{2}\rho v_1^2 + \rho gy_1 = P_2 + \frac{1}{2}\rho v_2^2 + \rho gy_2$$

Clicker Question 11.3

Fluid flows from left to right through the pipe shown. Points A and B are at the same height, but the cross-sectional area is bigger at point B than at A. The points B and C are at two different heights, but the cross-sectional area of the pipe is the same. Rank the pressure at the three locations in order from lowest to highest.

Bernoulli's equation: $P_1 + \frac{1}{2} \rho v_1^2 + \rho g y_1 = P_2 + \frac{1}{2} \rho v_2^2 + \rho g y_2$


a) $P_A > P_B > P_C$

b) $P_B > P_A = P_C$

c) $P_C > P_B > P_A$

d) $P_B > P_A$ & $P_B > P_C$

e) $P_C > P_A$ & $P_C > P_B$

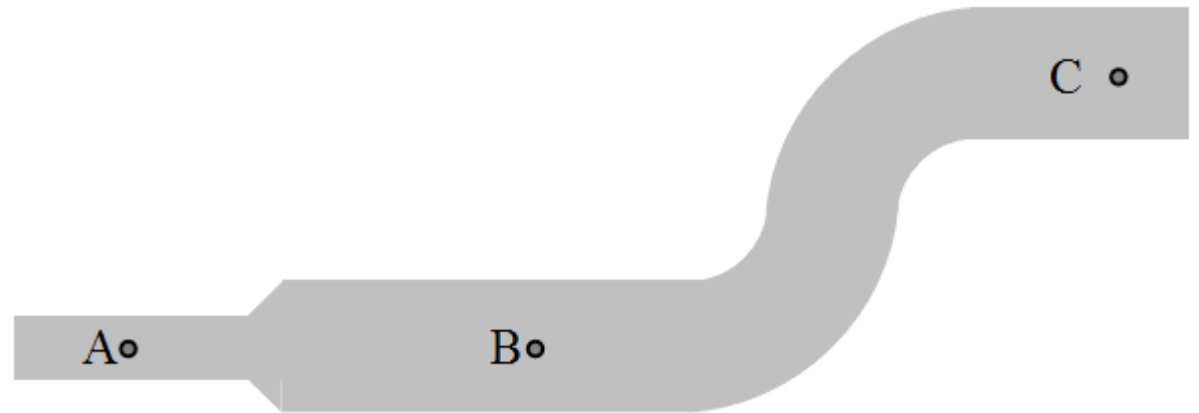

Clicker Question 11.3

Fluid flows from left to right through the pipe shown. Points A and B are at the same height, but the cross-sectional area is bigger at point B than at A. The points B and C are at two different heights, but the cross-sectional area of the pipe is the same. Rank the pressure at the three locations in order from lowest to highest.

Bernoulli's equation: $P_1 + \frac{1}{2} \rho v_1^2 + \rho g y_1 = P_2 + \frac{1}{2} \rho v_2^2 + \rho g y_2$

a) $P_A > P_B > P_C$

b) $P_B > P_A = P_C$

c) $P_C > P_B > P_A$

d) $P_B > P_A$ & $P_B > P_C$


e) $P_C > P_A$ & $P_C > P_B$

$$P_B + \rho g y_B = P_C + \rho g y_C$$

Since $y_C > y_B$: $P_B > P_C$

$$P_A + \frac{1}{2} \rho v_A^2 = P_B + \frac{1}{2} \rho v_B^2$$

Since $v_A > v_B$: $P_B > P_A$

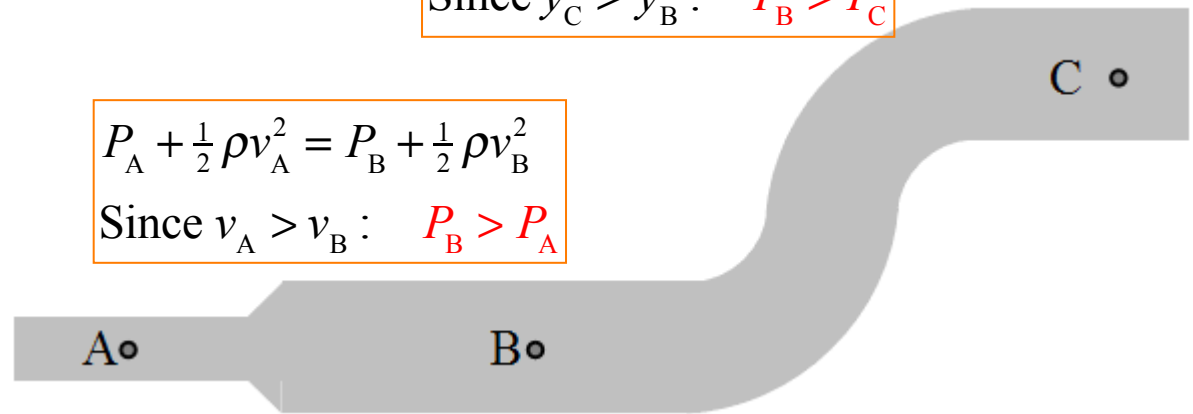


Pipe area grows: $v_A > v_B$

Chapter 12

Temperature and Heat

12.1 Common Temperature Scales

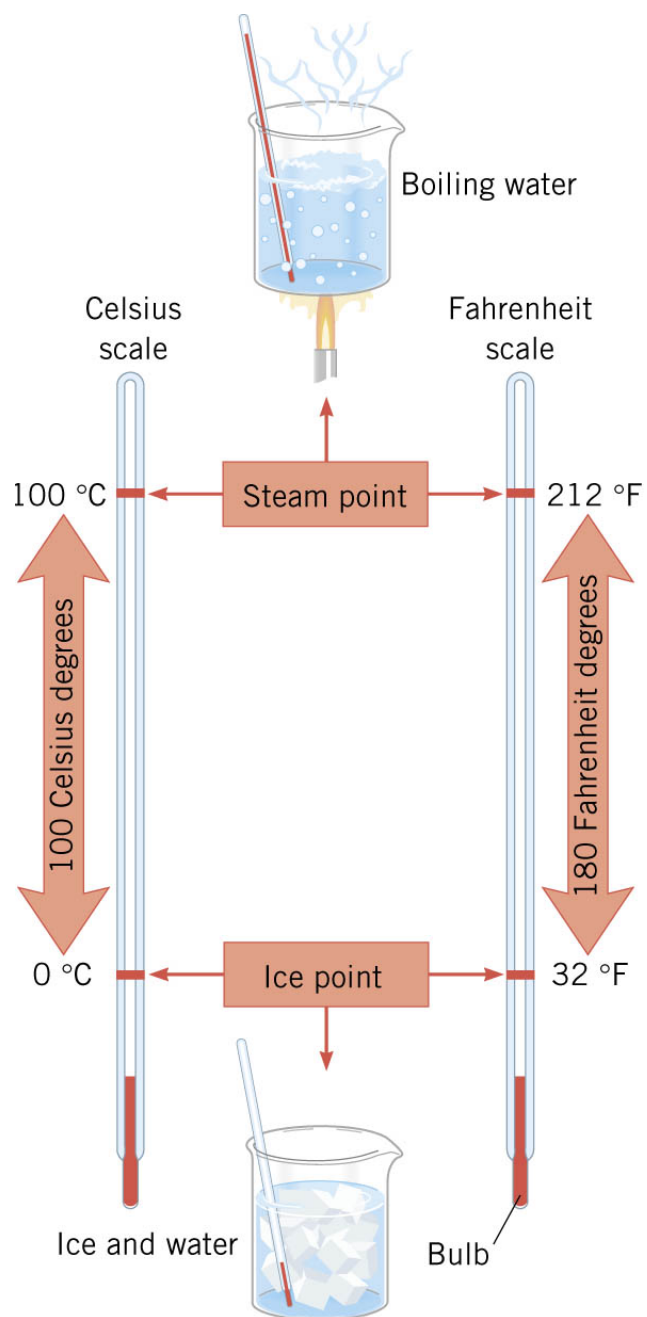

Temperatures are reported in **degrees-Celsius** or **degrees-Fahrenheit**.

Temperature changes, on the other hand, are reported in **Celsius-degrees** or **Fahrenheit-degrees**:

$$1\text{ }^{\circ}\text{C} = \frac{5}{9}\text{ }^{\circ}\text{F} \quad \left(\frac{100}{180} = \frac{5}{9} \right)$$


Convert $^{\circ}\text{F}$ to $^{\circ}\text{C}$:

$$^{\circ}\text{C} = \frac{5}{9} (^{\circ}\text{F} - 32)$$

Convert $^{\circ}\text{C}$ to $^{\circ}\text{F}$:

$$^{\circ}\text{F} = \frac{9}{5} ^{\circ}\text{C} + 32$$


12.1 The Kelvin Temperature Scale

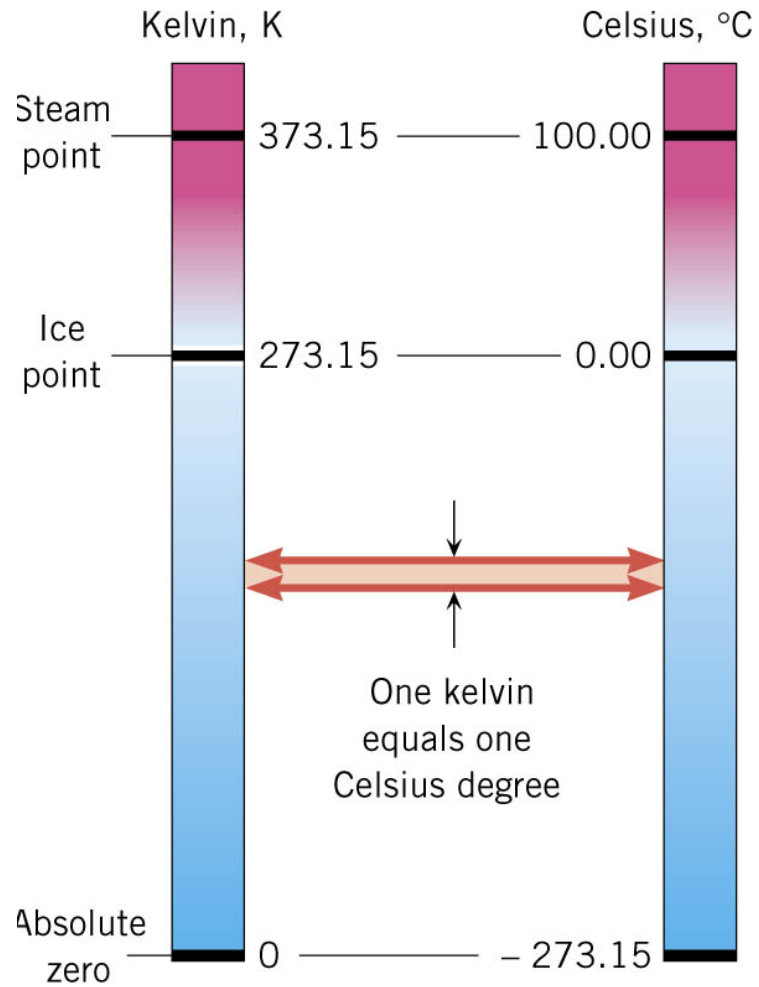

Kelvin temperature


$$T = T_c + 273.15$$

12.1 The Kelvin Temperature Scale

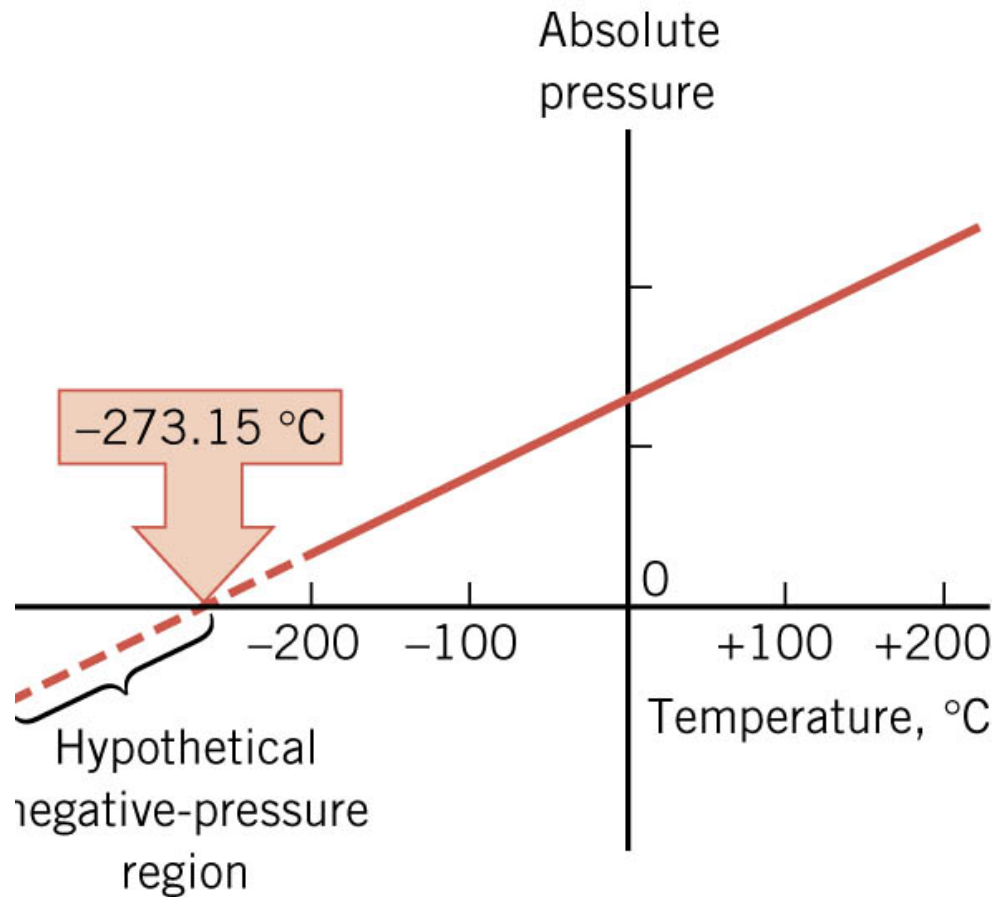



absolute zero point = -273.15°C

A constant-volume gas thermometer.

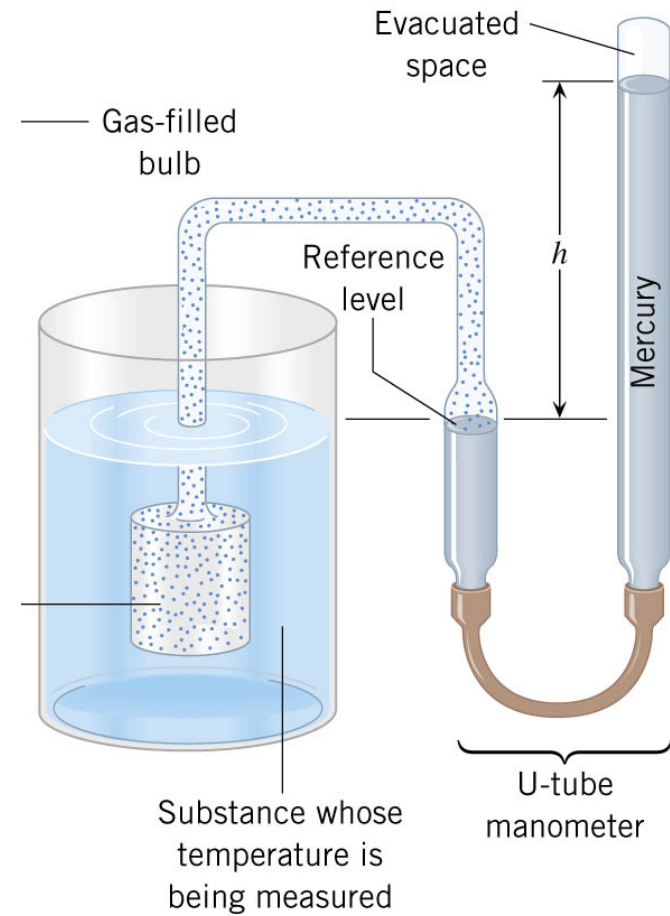


12.1 Thermometers

Thermometers make use of the change in some physical property with temperature. A property that changes with temperature is called a ***thermometric property***.

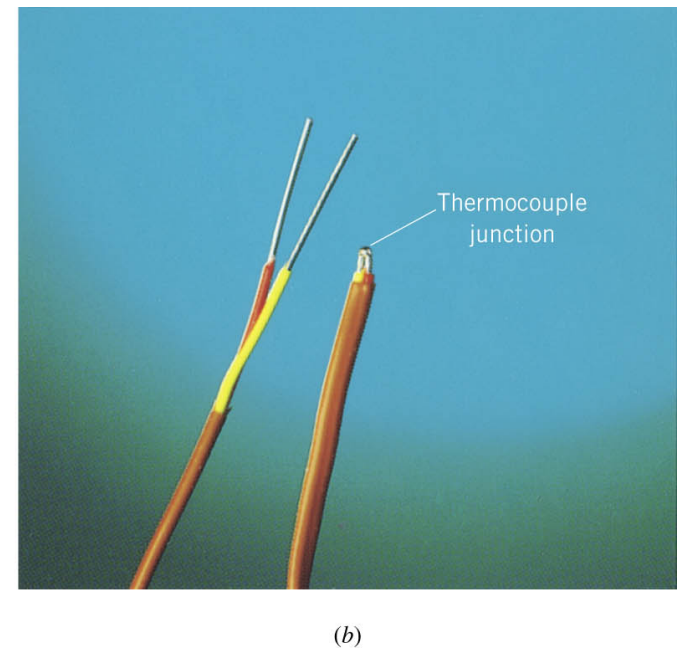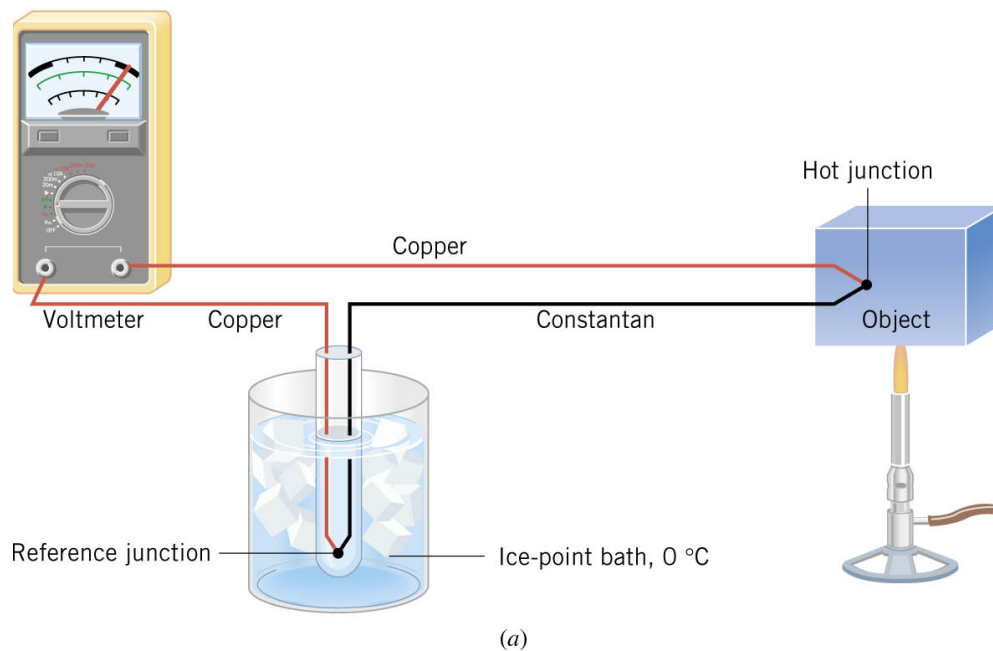

12.2 Linear Thermal Expansion


NORMAL SOLIDS

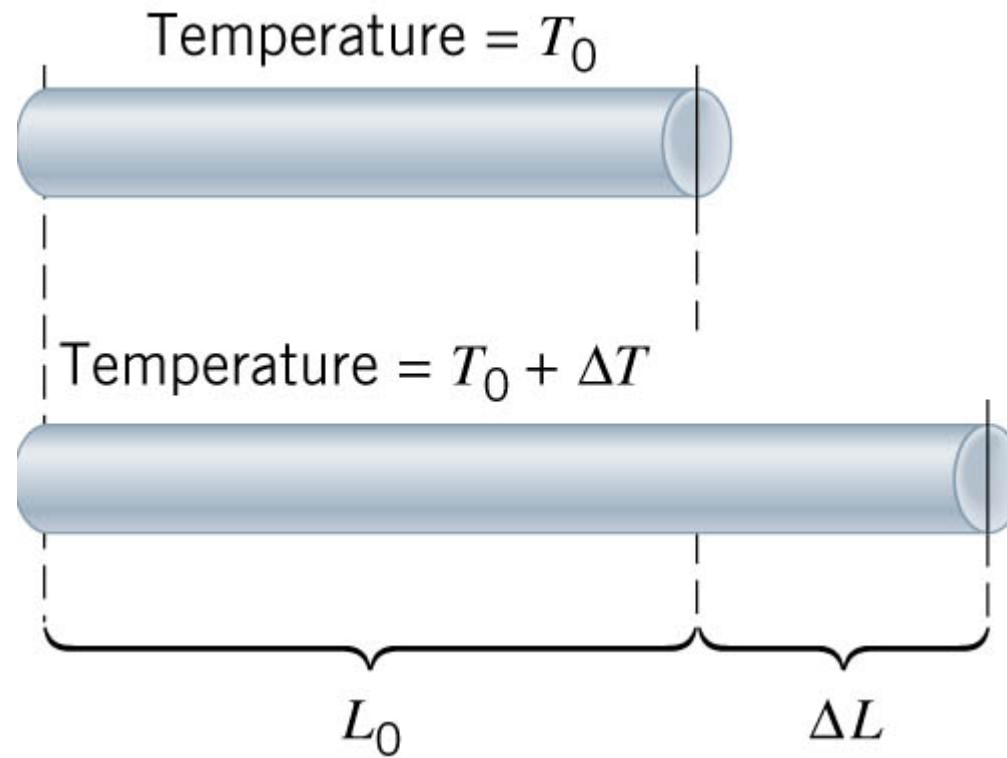

12.2 Linear Thermal Expansion

LINEAR THERMAL EXPANSION OF A SOLID

The length of an object changes when its temperature changes:

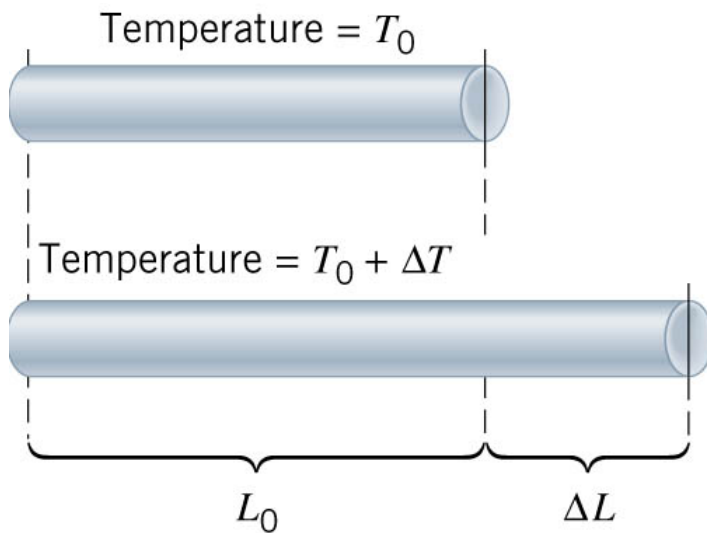

Change in length proportional to original length and temperature change.

$$\Delta L = \alpha L \Delta T$$

coefficient of
linear expansion

Common Unit for the Coefficient of Linear Expansion: $\frac{1}{\text{C}^\circ} = (\text{C}^\circ)^{-1}$

12.2 Linear Thermal Expansion

Table 12.1 Coefficients of Thermal Expansion for Solids and Liquids^a

Substance	Coefficient of Thermal Expansion (C°) ⁻¹	
	Linear (α)	Volume (β)
Solids		
Aluminum	23×10^{-6}	69×10^{-6}
Brass	19×10^{-6}	57×10^{-6}
Concrete	12×10^{-6}	36×10^{-6}
Copper	17×10^{-6}	51×10^{-6}
Glass (common)	8.5×10^{-6}	26×10^{-6}
Glass (Pyrex)	3.3×10^{-6}	9.9×10^{-6}
Gold	14×10^{-6}	42×10^{-6}
Iron or steel	12×10^{-6}	36×10^{-6}
Lead	29×10^{-6}	87×10^{-6}
Nickel	13×10^{-6}	39×10^{-6}
Quartz (fused)	0.50×10^{-6}	1.5×10^{-6}
Silver	19×10^{-6}	57×10^{-6}
Liquids^b		
Benzene	—	1240×10^{-6}
Carbon tetrachloride	—	1240×10^{-6}
Ethyl alcohol	—	1120×10^{-6}
Gasoline	—	950×10^{-6}
Mercury	—	182×10^{-6}
Methyl alcohol	—	1200×10^{-6}
Water	—	207×10^{-6}

^aThe values for α and β pertain to a temperature near 20 °C.

^bSince liquids do not have fixed shapes, the coefficient of linear expansion is not defined for them.



12.2 Linear Thermal Expansion

Example: The Buckling of a Sidewalk

A concrete sidewalk is constructed between two buildings on a day when the temperature is 25°C. As the temperature rises to 38°C, the slabs expand, but no space is provided for thermal expansion. Determine the distance y in part (b) of the drawing.

$$\begin{aligned}\Delta L &= \alpha L_o \Delta T \\ &= \left[12 \times 10^{-6} (\text{C}^\circ)^{-1} \right] (3.0 \text{ m}) (13 \text{ C}^\circ) \\ &= 0.00047 \text{ m}\end{aligned}$$


$$\begin{aligned}y &= \sqrt{(3.00047 \text{ m})^2 - (3.00000 \text{ m})^2} \\ &= 0.053 \text{ m}\end{aligned}$$

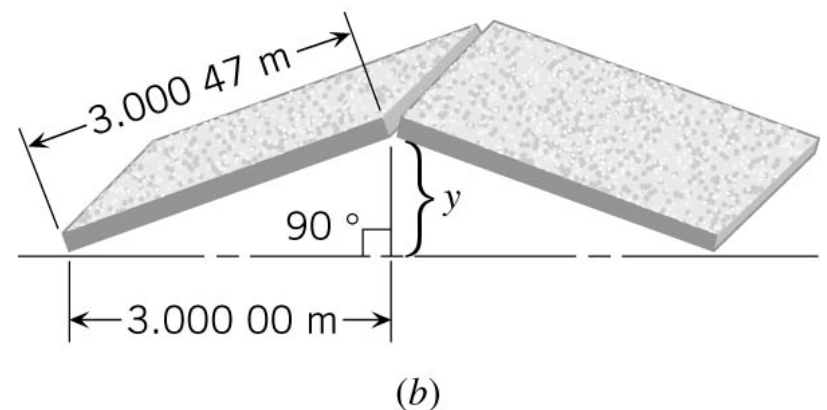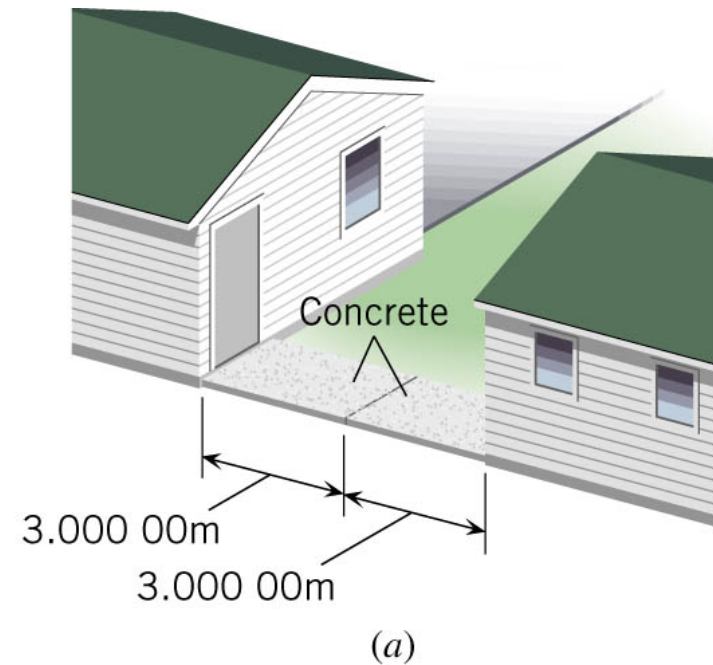

12.2 Linear Thermal Expansion

Example: The Stress on a Steel Beam

The beam is mounted between two concrete supports when the temperature is 23°C. What compressional stress must the concrete supports apply to each end of the beam, if they are to keep the beam from expanding when the temperature rises to 42°C?

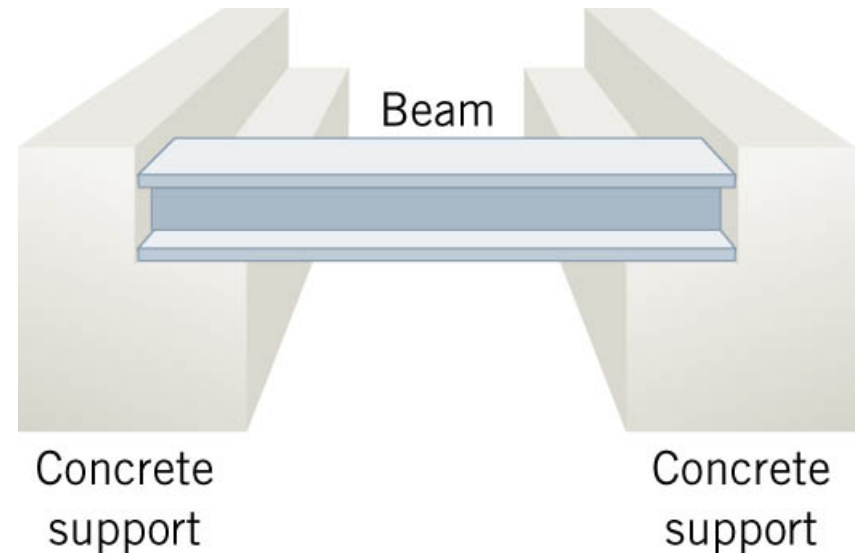

$$\begin{aligned}\text{Stress} &= \frac{F}{A} = Y \frac{\Delta L}{L_0} \quad \text{with } \Delta L = \alpha L_0 \Delta T \\ &= Y \alpha \Delta T \\ &= (2.0 \times 10^{11} \text{ N/m}^2) \left[12 \times 10^{-6} (\text{C}^\circ)^{-1} \right] (19 \text{ C}^\circ) \\ &= 4.7 \times 10^7 \text{ N/m}^2\end{aligned}$$

Pressure at ends of the beam, $4.7 \times 10^7 \text{ N/m}^2 \approx 170 \text{ atmospheres}$ ($1 \times 10^5 \text{ N/m}^2$)

12.2 Linear Thermal Expansion

Conceptual Example: Expanding Cylinders


As the cylinders are heated to the same, but higher, temperature, cylinder C falls off, while cylinder A becomes tightly wedged to cylinder B.

Which cylinder is made from which material?


Diameter change proportional to α .

$$\alpha_{\text{Pb}} > \alpha_{\text{Brass}} > \alpha_{\text{Fe}}$$

Lead ring falls off steel, brass ring sticks inside.

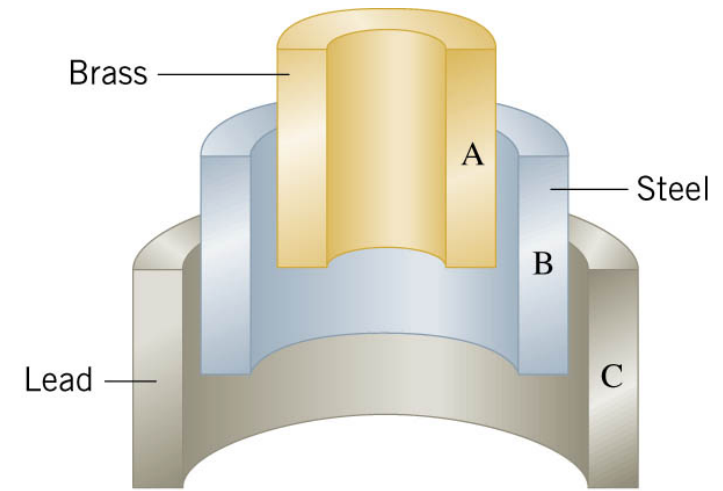

(a)

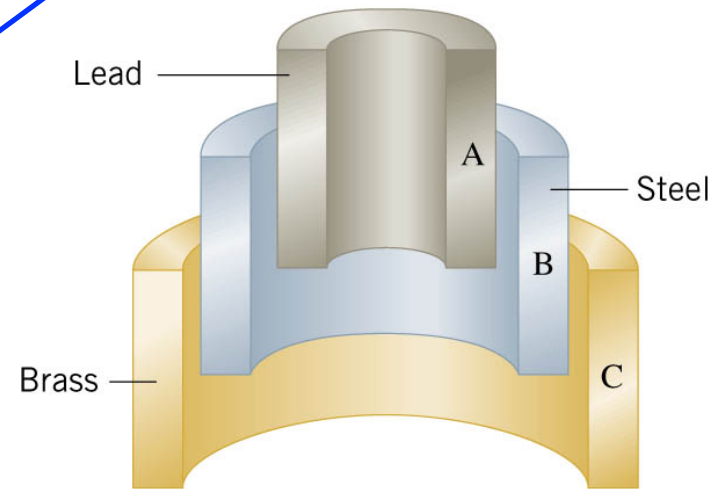

(b)

Table 12.1 Coefficients of Thermal Expansion for Solids and Liquids^a

Substance	Coefficient of Thermal Expansion (C°) ⁻¹	
	Linear (α)	Volume (β)
Solids	Linear thermal expansion	Volume thermal expansion
Aluminum	23×10^{-6}	69×10^{-6}
Brass	19×10^{-6}	57×10^{-6}
Iron or steel	12×10^{-6}	36×10^{-6}
Lead	29×10^{-6}	87×10^{-6}


$$\Delta L = \alpha L_0 \Delta T$$

$$\Delta V = \beta V_0 \Delta T$$

12.2 Volume Thermal Expansion

Example: An Automobile Radiator

The radiator is made of copper and the coolant has an expansion coefficient of $4.0 \times 10^{-4} (\text{C}^\circ)^{-1}$. If the radiator is filled to its 15-quart capacity when the engine is cold (6°C), how much overflow will spill into the reservoir when the coolant reaches its operating temperature (92°C)?


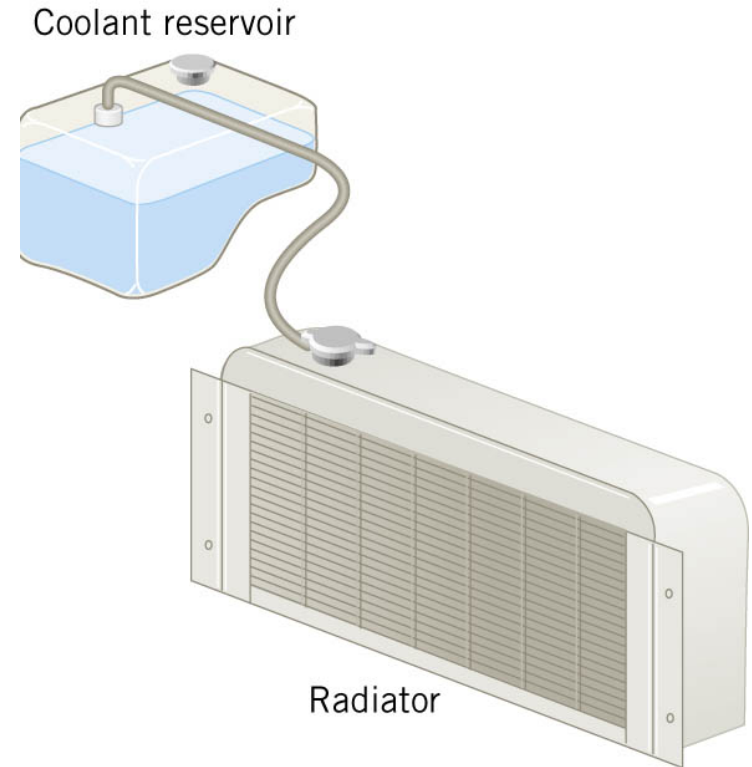


$$\begin{aligned}\Delta V_{\text{coolant}} &= \left[4.10 \times 10^{-4} (\text{C}^\circ)^{-1} \right] (15 \text{ liters}) (86 \text{ C}^\circ) \\ &= 0.53 \text{ liters} \\ \Delta V_{\text{radiator}} &= \left[51 \times 10^{-6} (\text{C}^\circ)^{-1} \right] (15 \text{ liters}) (86 \text{ C}^\circ) \\ &= 0.066 \text{ liters}\end{aligned}$$

$$\begin{aligned}\Delta V_{\text{expansion}} &= (0.53 - 0.066) \text{ liters} \\ &= 0.46 \text{ liters}\end{aligned}$$

12.2 Volume Thermal Expansion

Expansion of water.

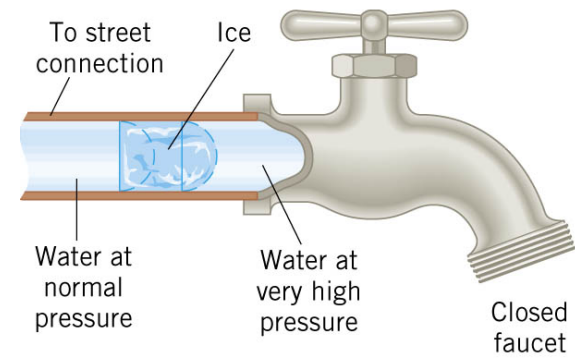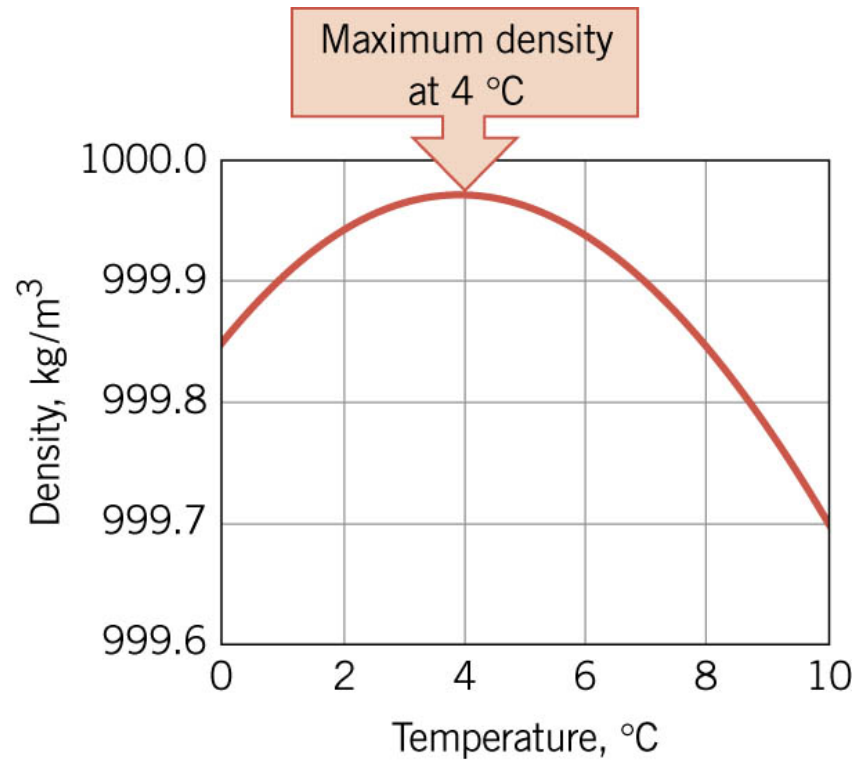


12.3 Molecular Mass, the Mole, and Avogadro's Number

The **atomic number** of an element is the # of protons in its nucleus.

Isotopes of an element have different # of neutrons in its nucleus.

The **atomic mass unit** (symbol u) is used to compare the mass of elements.

The reference is the most abundant isotope of carbon, which is called carbon-12.

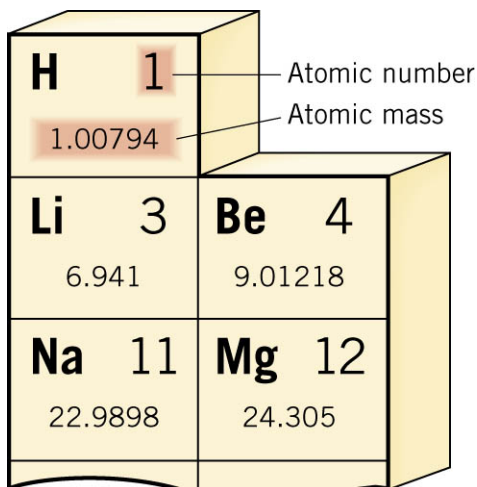

H 1 1.00794	
Li 3 6.941	Be 4 9.01218
Na 11 22.9898	Mg 12 24.305

$$1 \text{ u} = 1.6605 \times 10^{-24} \text{ g} = 1.6605 \times 10^{-27} \text{ kg}$$

The atomic mass is given in atomic mass units. For example, a Li atom has a mass of 6.941u.

One **mole** (mol) of a substance (element or molecule) contains as many particles as there are atoms in 12 grams of the isotope carbon-12. The number of atoms in 12 grams of carbon-12 is known as Avogadro's number, N_A .

Avogadro's number

$$N_A = 6.022 \times 10^{23} \text{ mol}^{-1}$$

12.3 *Molecular Mass, the Mole, and Avogadro's Number*

The mass per mole (in g/mol) of a substance has the same numerical value as the atomic or molecular mass of the substance (in atomic mass units).

For example Hydrogen has an atomic mass of 1.00794 g/mol, while the mass of a single hydrogen atom is 1.00794 u.

N : # of atoms or molecules,

n : # of moles of element or molecule

m_p : atomic mass (amu) \Rightarrow also grams/mole

$$N = nN_A$$

$$m = nm_p$$

12.3 Molecular Mass, the Mole, and Avogadro's Number

Example: Hope Diamond & Rosser Reeves Ruby

The Hope diamond (44.5 carats) is almost pure carbon. The Rosser Reeves ruby (138 carats) is primarily aluminum oxide (Al_2O_3). One carat is equivalent to a mass of 0.200 g. Determine (a) the number of carbon atoms in the Hope diamond and (b) the number of Al_2O_3 molecules in the ruby.

$$\left[2(26.98) + 3(15.99) \right] \text{g/mole}$$

$$(a) \quad n = \frac{m}{\text{Mass per mole}} = \frac{(44.5 \text{ carats}) \left[(0.200 \text{ g}) / (1 \text{ carat}) \right]}{12.011 \text{ g/mol}} = 0.741 \text{ mol}$$

$$N = nN_A = (0.741 \text{ mol}) (6.022 \times 10^{23} \text{ mol}^{-1}) = 4.46 \times 10^{23} \text{ atoms}$$

$$(b) \quad n = \frac{m}{\text{Mass per mole}} = \frac{(138 \text{ carats}) \left[(0.200 \text{ g}) / (1 \text{ carat}) \right]}{101.96 \text{ g/mol}} = 0.271 \text{ mol}$$


$$N = nN_A = (0.271 \text{ mol}) (6.022 \times 10^{23} \text{ mol}^{-1}) = 1.63 \times 10^{23} \text{ atoms}$$

12.3 The Ideal Gas Law

An **ideal gas** is an idealized model for real gases that have sufficiently low densities, **interacting only by elastic collisions**.


At constant volume the pressure is proportional to the temperature.

$$P \propto T$$

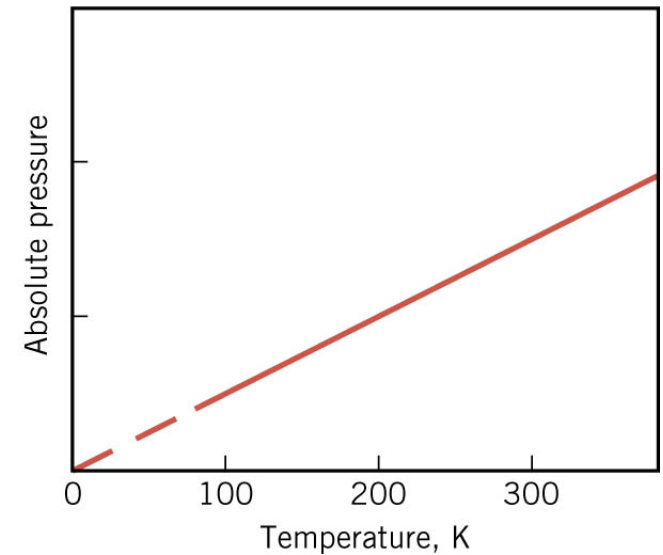

At constant temperature, the pressure is inversely proportional to the volume.

$$P \propto 1/V$$

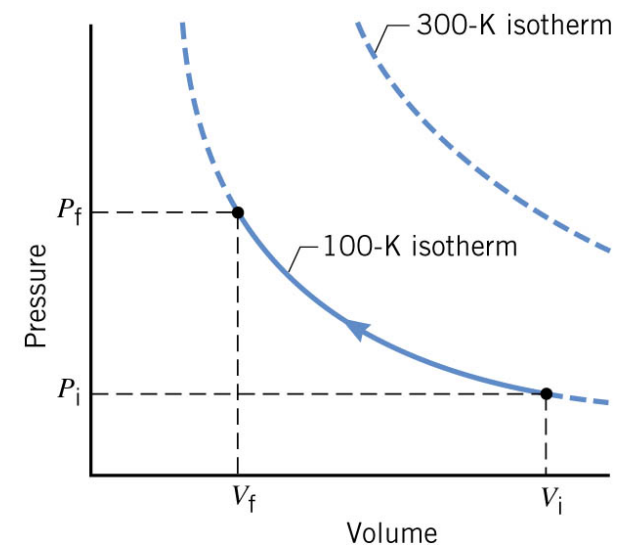

The pressure is also proportional to the amount of gas.

$$P \propto n$$

Clicker Question 12.1

Under which of the following circumstances does a real gas behave like an ideal gas?

- a) The gas particles move very slowly.
- b) The gas particles do not collide with each other very often.
- c) The gas particles just bounce off each other.
- d) The interaction between the gas particles and the walls of the container is negligible.
- e) There are only one kind of particles in the container.

Clicker Question 12.1

Under which of the following circumstances does a real gas behave like an ideal gas?

- a) The gas particles move very slowly.
- b) The gas particles do not collide with each other very often.
- c) The gas particles just bounce off each other.**
- d) The interaction between the gas particles and the walls of the container is negligible.
- e) There are only one kind of particles in the container.

12.3 The Ideal Gas Law

THE IDEAL GAS LAW

The absolute pressure of an ideal gas is directly proportional to the Kelvin temperature and the number of moles (n) of the gas and is inversely proportional to the volume of the gas.

$$P = \frac{nRT}{V}$$

$$PV = nRT$$

$$R = 8.31 \text{ J}/(\text{mol} \cdot \text{K})$$

Another form for the Ideal Gas Law using the number of atoms (N)

$$PV = nRT$$

$$= N \left(\frac{R}{N_A} \right) T$$

$$N = nN_A$$

$$PV = Nk_B T$$

$$k_B = \frac{R}{N_A} = \frac{8.31 \text{ J}/(\text{mol} \cdot \text{K})}{6.022 \times 10^{23} \text{ mol}^{-1}} = 1.38 \times 10^{-23} \text{ J/K}$$

12.3 The Ideal Gas Law

Example: Oxygen in the Lungs

In the lungs, the respiratory membrane separates tiny sacs of air (pressure $1.00 \times 10^5 \text{ Pa}$) from the blood in the capillaries. These sacs are called alveoli. The average radius of the alveoli is 0.125 mm , and the air inside contains 14% oxygen. Assuming that the air behaves as an ideal gas at 310 K , find the number of oxygen molecules in one of these sacs.

$$PV = NkT$$

$$\begin{aligned} N_{tot} &= \frac{PV}{k_B T} = \frac{(1.00 \times 10^5 \text{ Pa}) \left[\frac{4}{3} \pi (0.125 \times 10^{-3} \text{ m})^3 \right]}{(1.38 \times 10^{-23} \text{ J/K})(310 \text{ K})} \\ &= 1.9 \times 10^{14} \end{aligned}$$

$$N_{\text{Oxy}} = (1.9 \times 10^{14}) \times (0.14) = 2.7 \times 10^{13}$$

Clicker Question 12.2

An ideal gas is enclosed within a container by a moveable piston. If the final temperature is two times the initial temperature and the volume is reduced to one-fourth of its initial value, what will the final pressure of the gas be relative to its initial pressure, P_1 ?

- a) $8P_1$
- b) $4P_1$
- c) $2P_1$
- d) $P_1/2$
- e) $P_1/4$

Clicker Question 12.2

An ideal gas is enclosed within a container by a moveable piston. If the final temperature is two times the initial temperature and the volume is reduced to one-fourth of its initial value, what will the final pressure of the gas be relative to its initial pressure, P_1 ?

a) $8P_1$

b) $4P_1$

c) $2P_1$

d) $P_1/2$

e) $P_1/4$


$$P_1 V_1 = nRT_1; \quad V_2 = V_1/4; \quad T_2 = 2T_1$$
$$P_2 = \frac{nRT_2}{V_2} = \frac{nR(2T_1)}{V_1/4} = 8 \frac{nRT_1}{V_1} = 8P_1$$

12.4 *Kinetic Theory of Gases*

The particles are in constant, random motion, colliding with each other and with the walls of the container.


Each collision changes the particle's speed.

As a result, the atoms and molecules have different speeds.

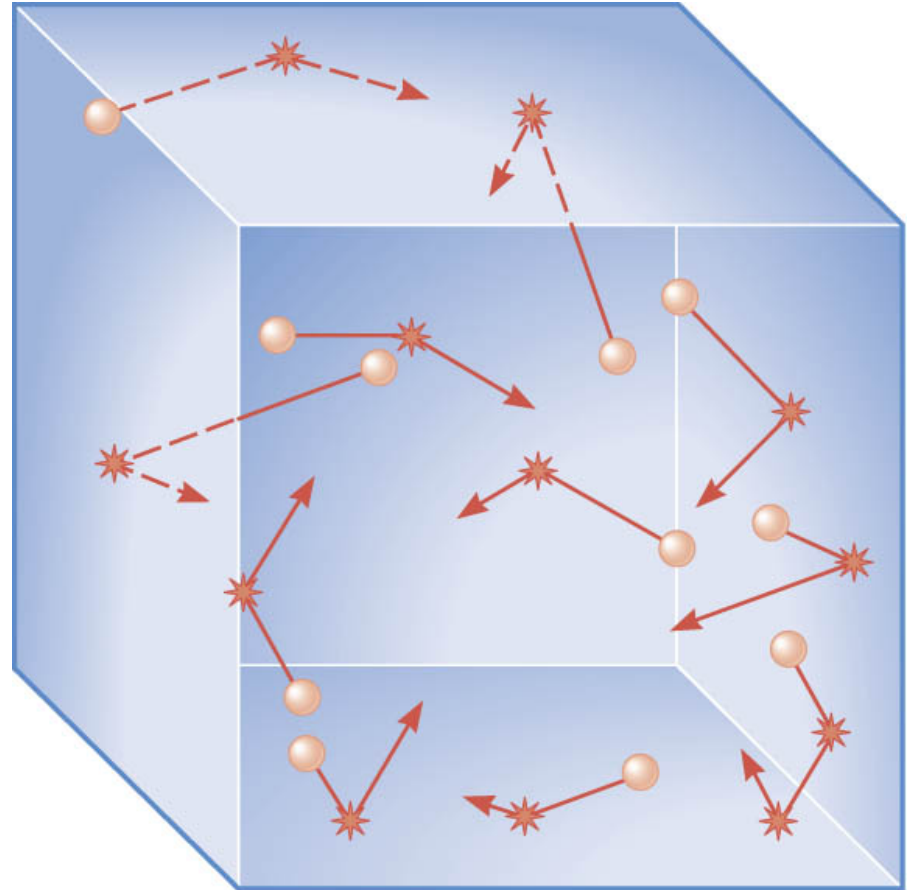


12.4 Kinetic Theory of Gases

THE DISTRIBUTION OF MOLECULAR SPEEDS

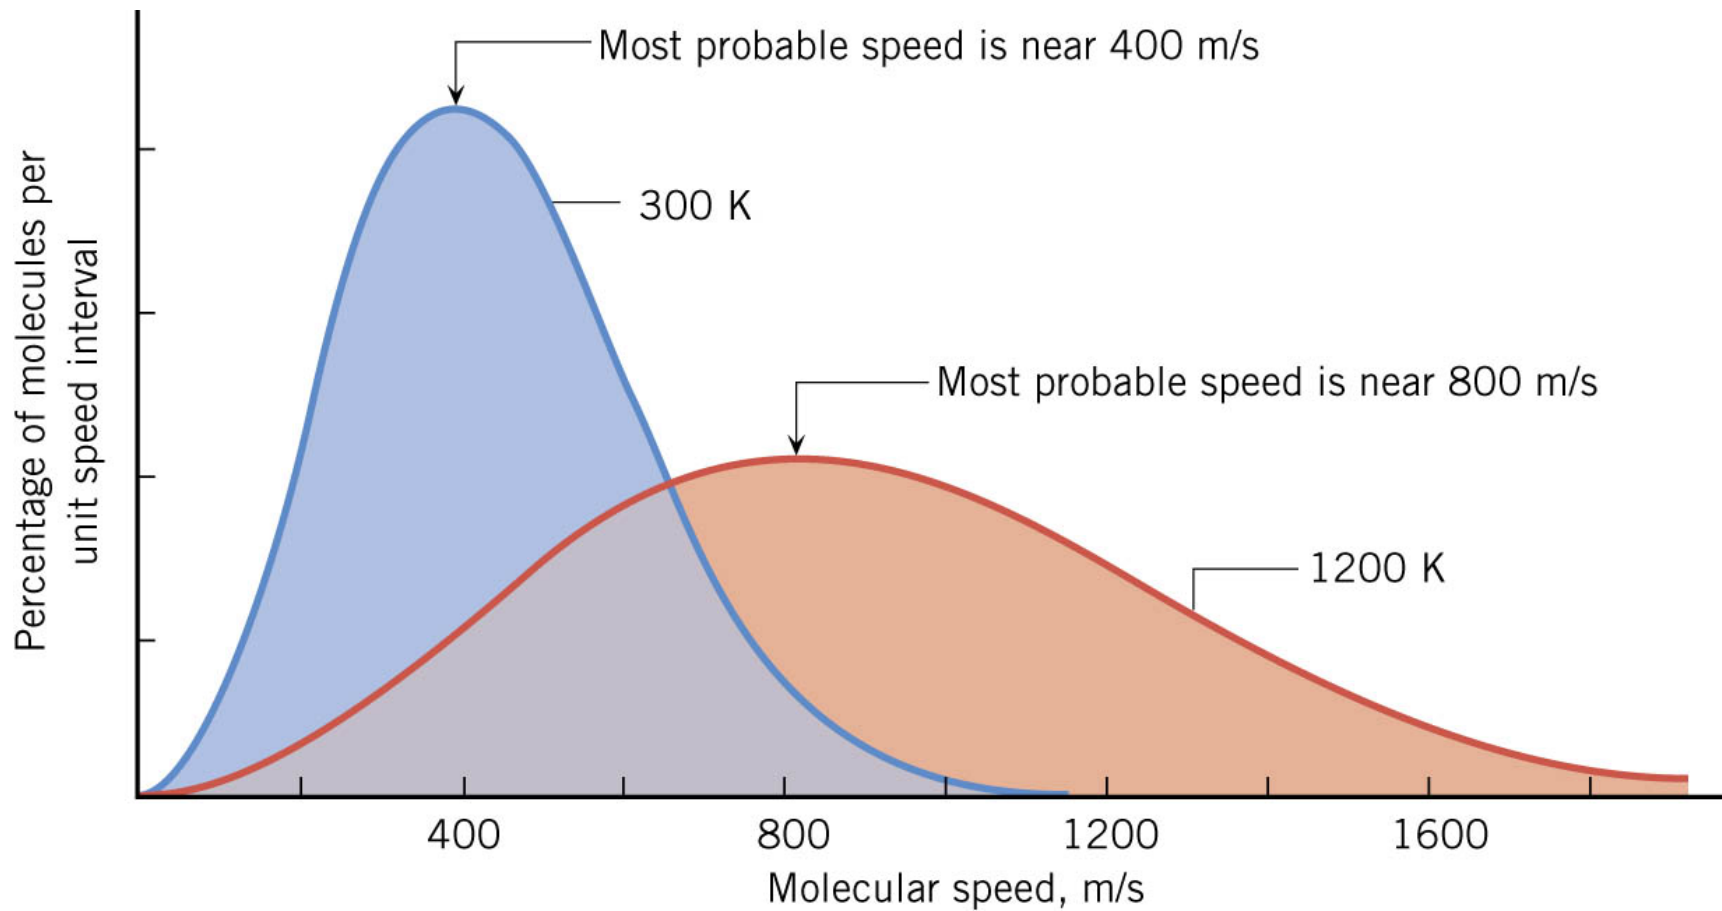

12.4 Kinetic Theory of Gases

KINETIC THEORY

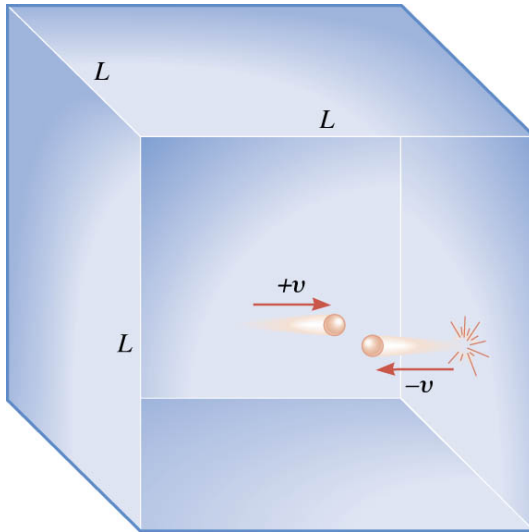

$$\sum F = ma = m \frac{\Delta v}{\Delta t} = \frac{\Delta(mv)}{\Delta t}$$

$$\begin{aligned} \text{Average force on each gas molecule when hitting the wall} &= \frac{\text{Final momentum} - \text{Initial momentum}}{\text{Time between successive collisions}} \\ &= \frac{(-mv) - (+mv)}{2L/v} = \frac{-mv^2}{L} \end{aligned}$$

Average force
on the wall

$$\bar{F} = \left(\frac{N}{3} \right) \left(\frac{mv^2}{L} \right) \Rightarrow P = \frac{\bar{F}}{A} = \frac{\bar{F}}{L^2} = \left(\frac{N}{3} \right) \left(\frac{mv^2}{L^3} \right)$$

$$PV = \left(\frac{N}{3} \right) mv^2 = \frac{2}{3} N \left(\frac{1}{2} mv^2 \right)$$

$$PV = NkT$$

$$\overline{KE} = \frac{1}{2} mv^2$$

$$v_{rms} = \sqrt{\overline{v^2}}$$

root mean
square speed

Temperature reflects the average
Kinetic Energy of the molecules

$$\frac{3}{2} kT = \frac{1}{2} mv_{rms}^2 = \overline{KE}$$

$$k = 1.38 \times 10^{-23} \text{ J/K}$$

12.4 Kinetic Theory of Gases

Example: The Speed of Molecules in Air

Air is primarily a mixture of nitrogen N_2 molecules (molecular mass 28.0u) and oxygen O_2 molecules (molecular mass 32.0u). Assume that each behaves as an ideal gas and determine the rms speeds of the nitrogen and oxygen molecules when the temperature of the air is 293K.

$$\frac{1}{2} m v_{rms}^2 = \frac{3}{2} k T$$

$$v_{rms} = \sqrt{\frac{3kT}{m}}$$

T must be in Kelvin
($K = C^\circ + 273$)

$$\begin{aligned} &\text{Nitrogen molecule} \\ m &= \frac{28.0 \text{ g/mol}}{6.022 \times 10^{23} \text{ mol}^{-1}} \\ &= 4.65 \times 10^{-26} \text{ kg} \end{aligned}$$

$$\begin{aligned} v_{rms} &= \sqrt{\frac{3kT}{m}} \\ &= \sqrt{\frac{3(1.38 \times 10^{-23} \text{ J/K})(293 \text{ K})}{4.65 \times 10^{-26} \text{ kg}}} = 511 \text{ m/s} \end{aligned}$$


Molecules are moving really fast
but do not go very far before hitting
another molecule.

12.4 Kinetic Theory of Gases

THE INTERNAL ENERGY OF A MONATOMIC IDEAL GAS

$$\overline{\text{KE}} = \frac{1}{2} m v_{rms}^2 = \frac{3}{2} kT$$

Average KE per atom



multiply by the number of atoms

$$U = N \frac{3}{2} kT = \frac{3}{2} nRT$$


Total Internal Energy

THE INTERNAL ENERGY OF A MOLECULAR GAS
MUST INCLUDE MOLECULAR VIBRATIONS!

$\text{H}_2, \text{N}_2, \text{H}_2\text{O}, \text{SO}_2, \text{CO}_2, \dots$ (most gases except Nobel gases)

Clicker Question 12.3


Two sealed containers, labeled A and B as shown, are at the same temperature and each contain the same number of moles of an ideal monatomic gas. Which one of the following statements concerning these containers is true?

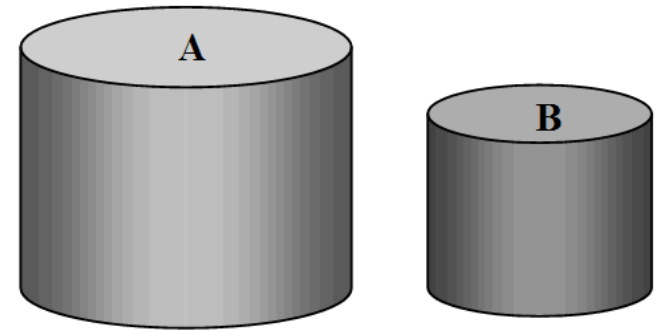

- a) The rms speed of the atoms in the gas is greater in B than in A
- b) The frequency of collisions of the atoms with the walls of container B are greater than that for container A
- c) The kinetic energy of the atoms in the gas is greater in B than in A.
- d) The pressure within container B is less than the pressure inside container A.
- e) The force that the atoms exert on the walls of container B are greater than in for those in container A.

Clicker Question 12.3

Two sealed containers, labeled A and B as shown, are at the same temperature and each contain the same number of moles of an ideal monatomic gas. Which one of the following statements concerning these containers is true?

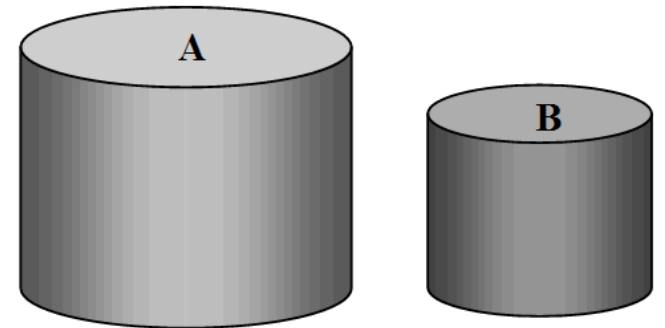

- a) The rms speed of the atoms in the gas is greater in B than in A
- b) The frequency of collisions of the atoms with the walls of container B are greater than that for container A**
- c) The kinetic energy of the atoms in the gas is greater in B than in A.
- d) The pressure within container B is less than the pressure inside container A.
- e) The force that the atoms exert on the walls of container B are greater than in for those in container A.

Chapter 13

Heat

13.1 Heat and Internal Energy

DEFINITION OF HEAT


Heat is energy that flows from a higher-temperature object to a lower-temperature object because of a difference in temperatures.

SI Unit of Heat: joule (J)


The heat that flows from hot to cold originates in the *internal energy* of the hot substance.

It is not correct to say that a substance contains heat. You must use the word *energy* or *internal energy*.

(a)

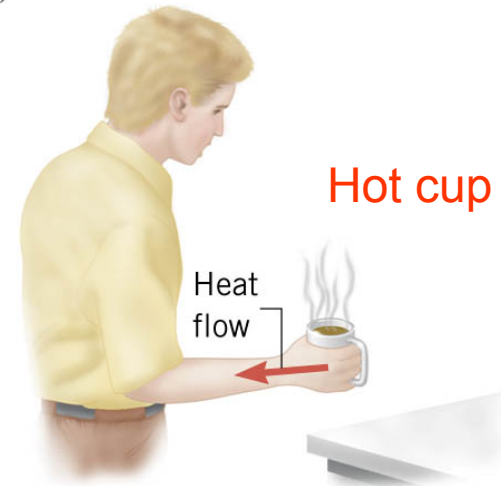

(b)

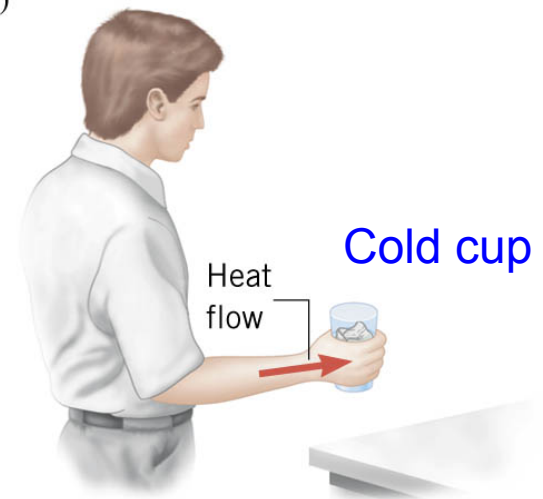

13.2 Heat and Temperature Change: Specific Heat Capacity

Temperature of an object reflects the amount of internal energy within it. But objects with the same temperature and mass can have DIFFERENT amounts of internal energy!

SOLIDS AND LIQUIDS (GASES ARE DIFFERENT)

HEAT SUPPLIED OR REMOVED IN CHANGING THE TEMPERATURE OF A SUBSTANCE.

The heat that must be supplied or removed to change the temperature of a substance is

$$Q = mc\Delta T$$

c , is the specific heat capacity of the substance

Common Unit for Specific Heat Capacity: $\text{J}/(\text{kg}\cdot\text{C}^\circ)$

$$\Delta T > 0, \text{ Heat added}$$

$$\Delta T < 0, \text{ Heat removed}$$

GASES

The value of the specific heat of a gas depends on whether the pressure or volume is held constant.

This distinction is not important for solids.

13.2 Heat and Temperature Change: Specific Heat Capacity

Example: A Hot Jogger

In a half-hour, a 65-kg jogger produces 8.0×10^5 J of heat. This heat is removed from the body by a variety of means, including sweating, one of the body's own temperature-regulating mechanisms. If the heat were not removed, how much would the body temperature increase?

$$Q = mc\Delta T$$
$$\Delta T = \frac{Q}{mc} = \frac{8.0 \times 10^5 \text{ J}}{(65 \text{ kg})[3500 \text{ J}/(\text{kg} \cdot \text{C}^\circ)]} = 3.5 \text{ C}^\circ$$

OTHER UNITS for heat production

1 cal = 4.186 joules (calorie)

1 kcal = 4186 joules ([kilo]calories for food)

Specific means per unit mass

Specific Heat Capacities^a of Some Solids and Liquids

Substance	Specific Heat Capacity, c $\text{J}/(\text{kg} \cdot \text{C}^\circ)$
Solids	
Aluminum	9.00×10^2
Copper	387
Glass	840
Human body (37 °C, average)	3500
Ice (−15 °C)	2.00×10^3
Iron or steel	452
Lead	128
Silver	235
Liquids	
Benzene	1740
Ethyl alcohol	2450
Glycerin	2410
Mercury	139
Water (15 °C)	4186

^aExcept as noted, the values are for 25 °C and 1 atm of pressure.

Clicker Question 13.1

Four 1-kg cylinders are heated to 100 C° and placed on top of a block of paraffin wax, which melts at 63 C°. There is one cylinder made from lead, one of copper, one of aluminum, and one of iron. After a few minutes, it is observed that the cylinders have sunk into the paraffin to differing depths. Rank the depths of the cylinders from deepest to shallowest..

$$Q = mc\Delta T$$

- a) lead > iron > copper > aluminum
- b) aluminum > copper > lead > iron
- c) aluminum > iron > copper > lead
- d) copper > aluminum > iron > lead
- e) iron > copper > lead > aluminum

Specific Heat Capacities^a of Some Solids and Liquids

Substance	Specific Heat Capacity, c J/(kg · C°)
Solids	
Aluminum	9.00×10^2
Copper	387
Glass	840
Human body (37 °C, average)	3500
Ice (−15 °C)	2.00×10^3
Iron or steel	452
Lead	128
Silver	235

Clicker Question 13.1

Four 1-kg cylinders are heated to 100 C° and placed on top of a block of paraffin wax, which melts at 63 C°. There is one cylinder made from lead, one of copper, one of aluminum, and one of iron. After a few minutes, it is observed that the cylinders have sunk into the paraffin to differing depths. Rank the depths of the cylinders from deepest to shallowest..

$$Q = mc\Delta T$$

- a) lead > iron > copper > aluminum
- b) aluminum > copper > lead > iron
- c) aluminum > iron > copper > lead**
- d) copper > aluminum > iron > lead
- e) iron > copper > lead > aluminum

Specific Heat Capacities^a of Some Solids and Liquids

Substance	Specific Heat Capacity, c J/(kg · C°)
Solids	
Aluminum	9.00×10^2 1
Copper	387 3
Glass	840
Human body (37 °C, average)	3500
Ice (−15 °C)	2.00×10^3
Iron or steel	452 2
Lead	128 4
Silver	235

13.2 Specific Heat Capacities (Gases)

To relate heat and temperature change in **solids and liquids (mass in kg)**, use:

$$Q = mc\Delta T \quad \text{specific heat capacity, } c \left[\text{J}/(\text{kg} \cdot ^\circ\text{C}) \right]$$

For **gases**, the amount of gas is given in moles, use molar heat capacities:

$$Q = nC\Delta T \quad \text{molar heat capacity, } C \left[\text{J}/(\text{mole} \cdot ^\circ\text{C}) \right]$$

$$C = (m/n)c = m_u c; \quad m_u = \text{mass/mole (kg)}$$

ALSO, for gases it is necessary to distinguish between the molar specific heat capacities at constant pressure and at constant volume:

$$C_P, C_V$$

**Constant pressure
for a monatomic ideal gas**

$$Q_P = nC_P\Delta T$$
$$C_P = \frac{5}{2}R$$

**Constant volume
for a monatomic ideal gas**

$$Q_V = nC_V\Delta T$$
$$C_V = \frac{3}{2}R$$

any ideal gas

$$C_P - C_V = R$$