



TEN 20-7211WIR


Efficiency versus Output Load

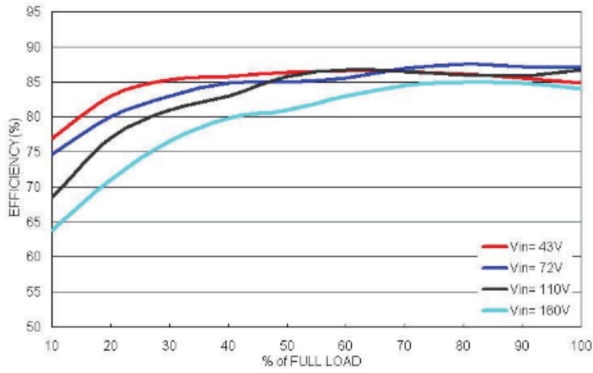


Power Dissipation versus Output Load

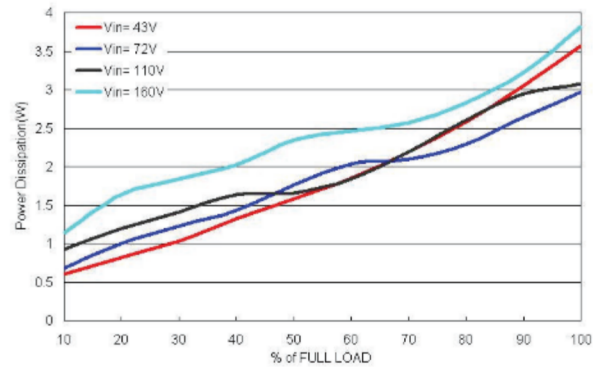


Efficiency versus Input Voltage

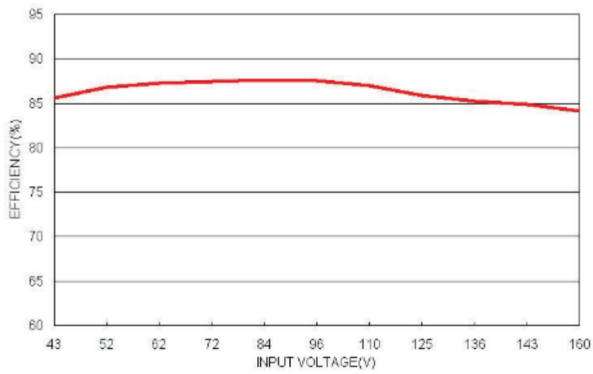

Derating Output Load versus Ambient Temperature

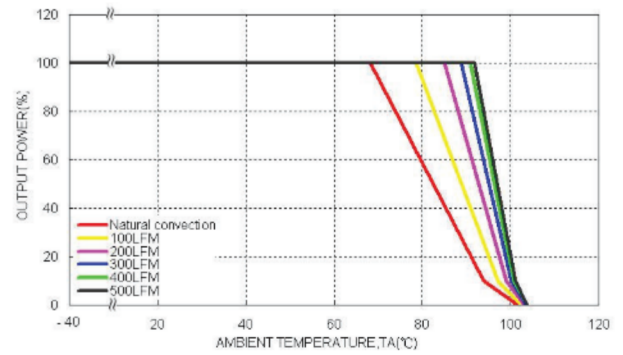


Derating Output Load versus Ambient Temperature (with Heatsink TEN-HS1)

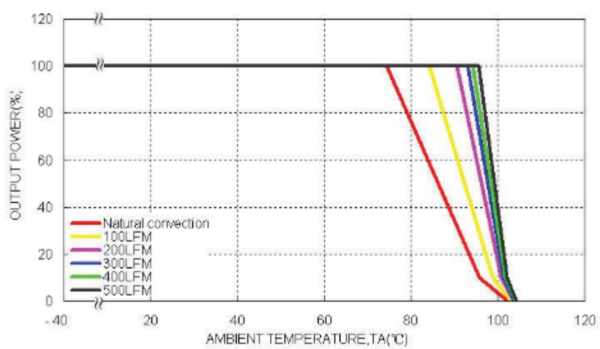


TEN 20-7211WIR


Typical Output Ripple and Noise
(with external capacitor; see datasheet)

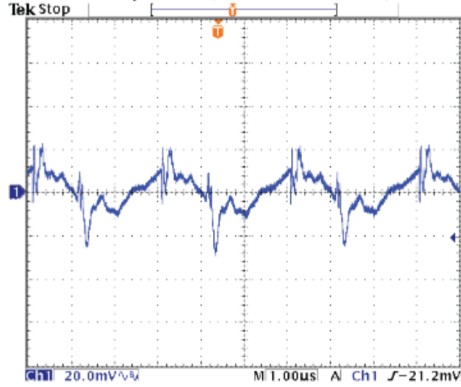

Transient Response to Dynamic Load Change (25%)

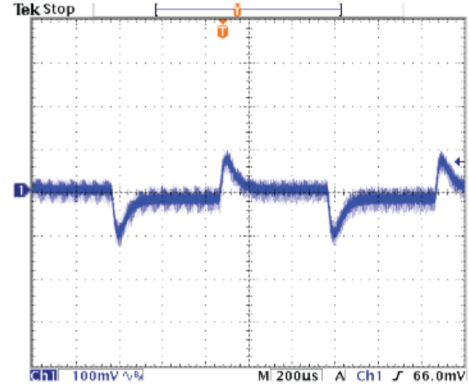

Typical Start-Up and Output Rise Characteristic

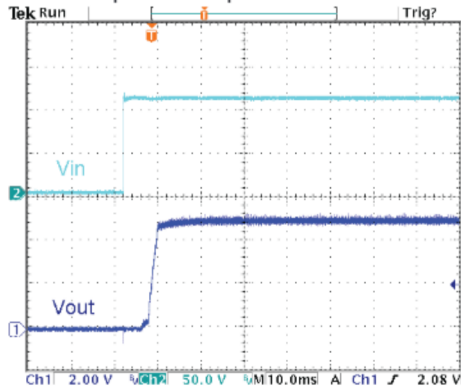

Remote on/off Voltage Start-Up Characteristic

