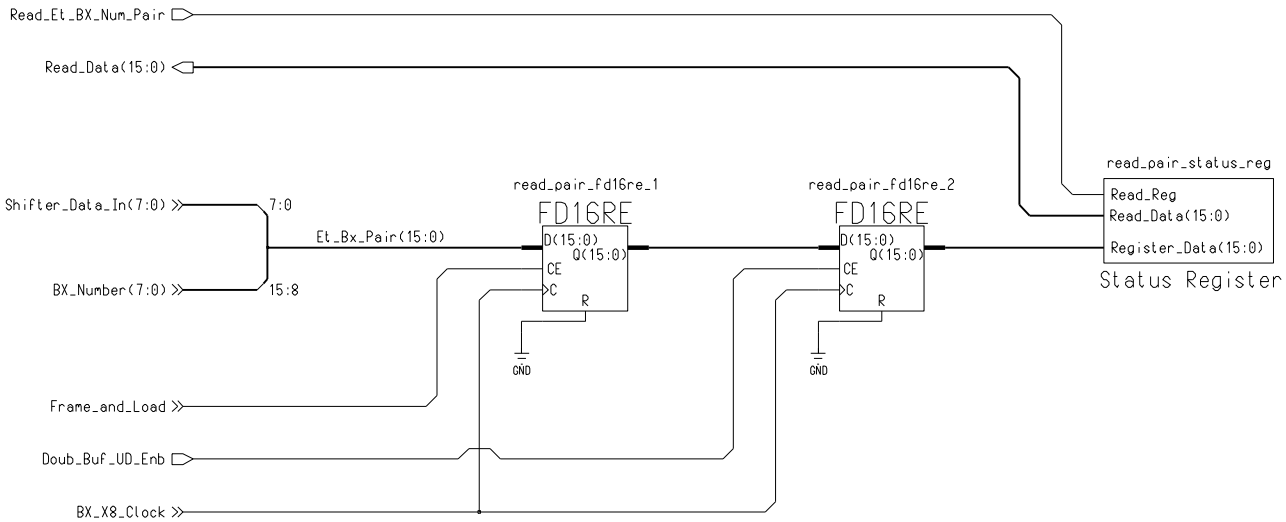

Status Register to Read
the 0,0 EM Et BX Number
data pair that is sent to the TAB.

The first FD16 captures data at the
same time as the One Lane Shifter.

The second FD16 does not update during VME Reads.

Engineer: Librarian	MICHIGAN STATE UNIVERSITY D0 Run II Upgrade Run IIB L1 Calorimeter Trigger	
Drawn by: Librarian		
R&D CHK:	TITLE: chan_lnk_output_shifter Channel Link Parity Generator and Output Shifter for T7	Size: C 4144
DOC CTRL CHK:		
MFG ENGR CHK:		

Changed by:	Date Changed:	Time Changed:	QA CHK:	REV:	Drawing Number:	Page:
Edmunds	Monday 9-MAY-2005	12:00:00				2