
<u>Hub FPGA Heat Sink</u> <u>Blank + 4 Mnt. Holes</u>

X =
Extrusion Width
about 101 mm
Y = 110 mm

Drw: M21 Rev. 23 Feb 2017

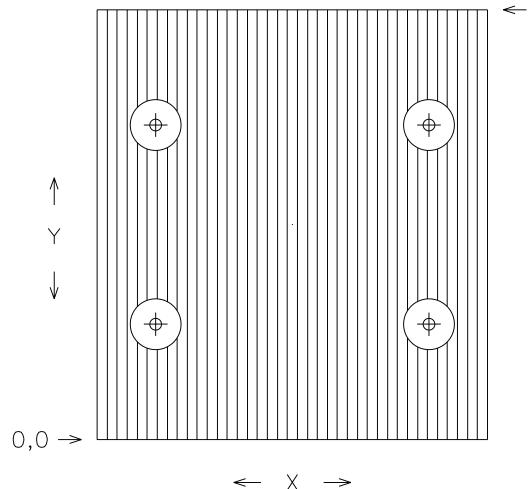

From the bar stock cut the heat sink blank Y dimension to a length of 110 mm.

Machine 4 Mounting Holes into each heat sink. Each of these holes consists of:

In a 11.5 mm diameter circle machine away the heat sink fins and just touch the base plate to level it.

Drill a fairly tight hole through the base plate for a 4-40 machine screw.

X,Y locations of these 4 Mounting Holes in mm:

15.5 , 80.5

85.5 , 80.5

15.5 , 29.5

85.5 , 29.5