Readout to L3 of Accepted Events

Based on the "results from event analysis" messages from the Worker node take the required action to readout to L3.

Admin gets the Word Counts for the passed event from the Worker. This information could come in the "results of analysis" messages from the Worker.

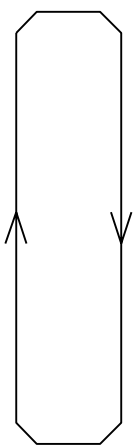

Admin setup the Word Counts for this event and the pointers to the proper locations in the Worker (and in itself) for the main memory event buffer that hold the event that we want to readout next.

A -> VBD "GO"

VBD -> A "DONE"

Admin "Tell other loops that we are now finished with needing this main memory event buffer for readout.

Admin gulp typically 10 SCL messages via VME from the SCL card.

Admin Decide, "Do I have another event to readout to L3 ?"